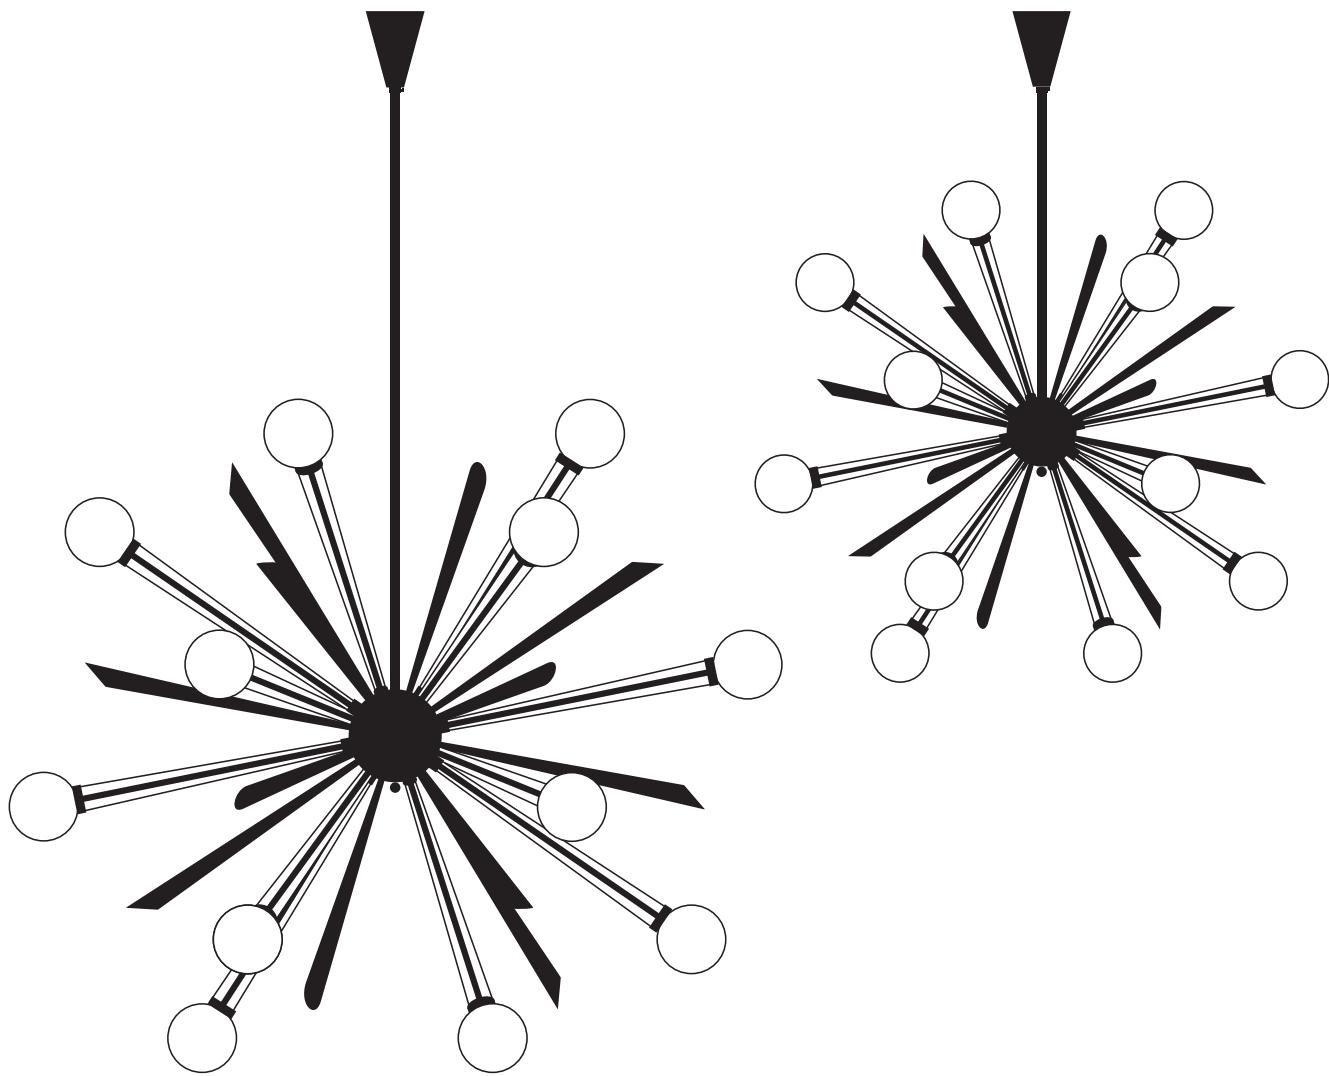


Installation
instructions



MC

Installation instructions

Chandelier Celebration V1 & V2

The Grand Show

Instructions

- Must be installed by a professional
- Handle items carefully
- Use appropriate screws and equipment
- Wear gloves during installation

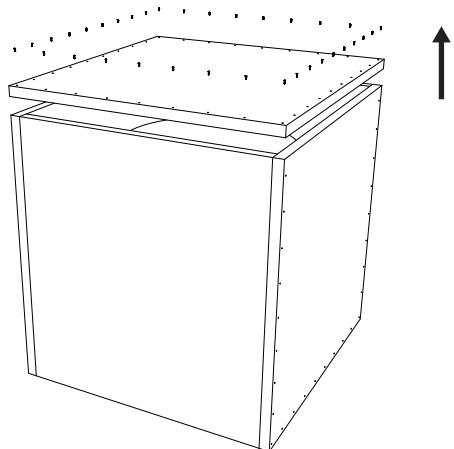
Assembly time

1h

Number of people required

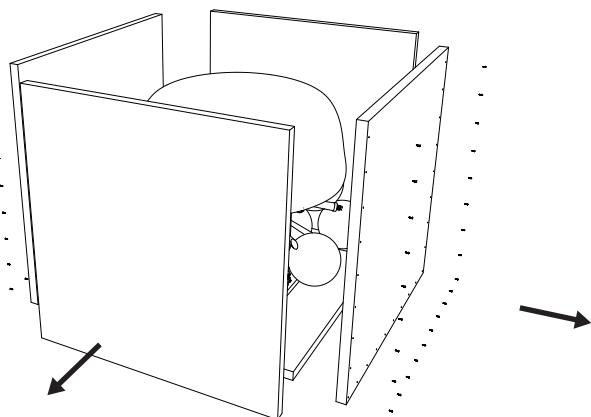
3

1



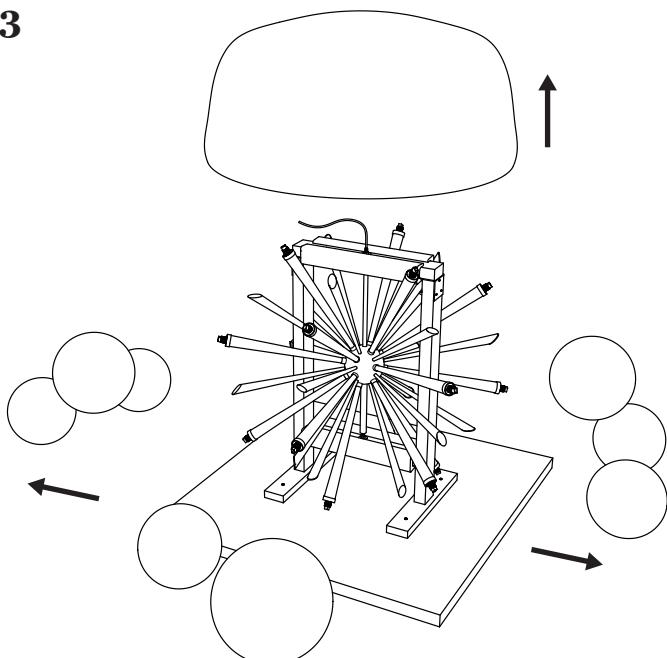
Remove the screws to take off the top plate of the wooden box.

2

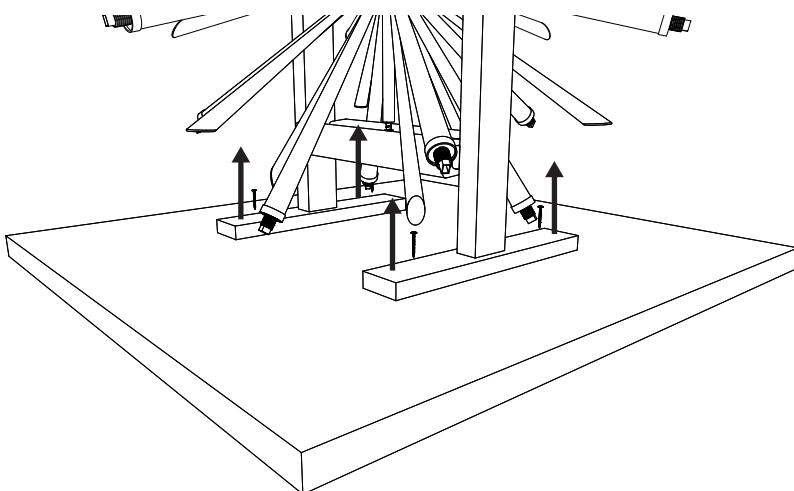


Then remove all the other screws to take off the four sides of the box.

3

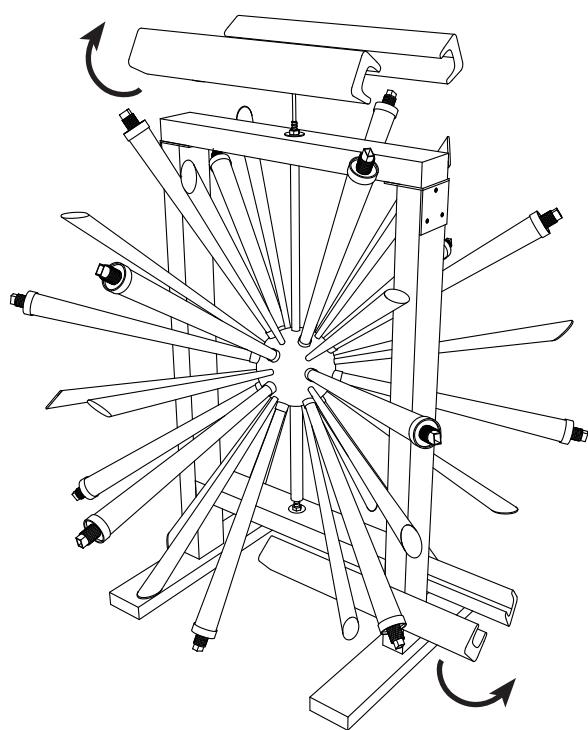


Carefully remove the bubble wrap covering the chandelier, then take off all the protective bags around it.

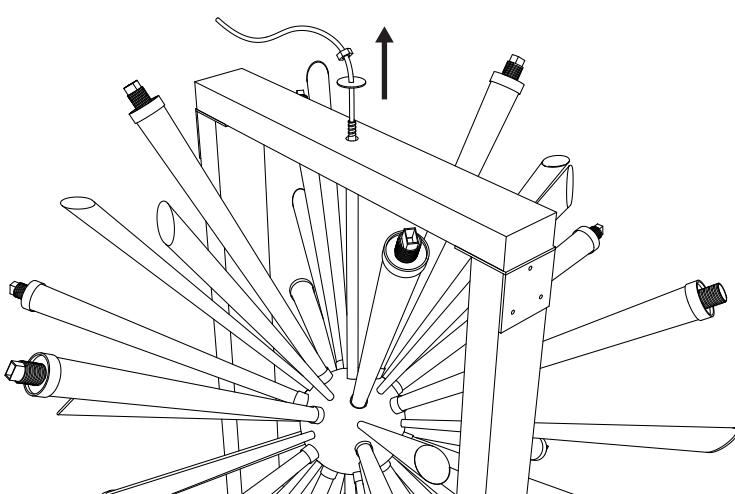
4

Remove the screws holding the two legs of the trestle to the bottom of the box.

Have two people lift the trestle and carry it just below the installation site.

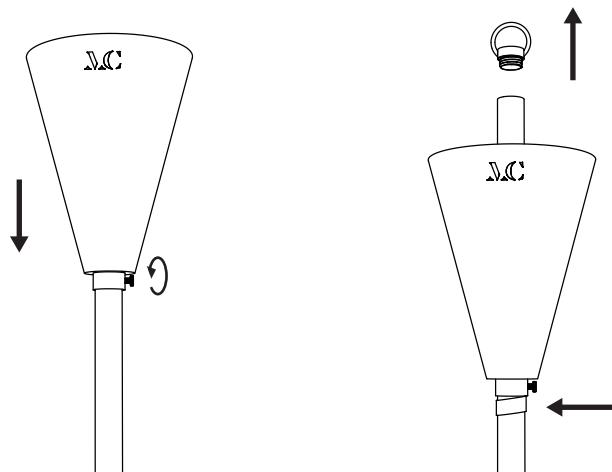
5

Gently remove the four protective foam pieces surrounding the trestle.

6

Remove the bolt and washer at the top of the trestle by sliding them along the electrical cable.

7

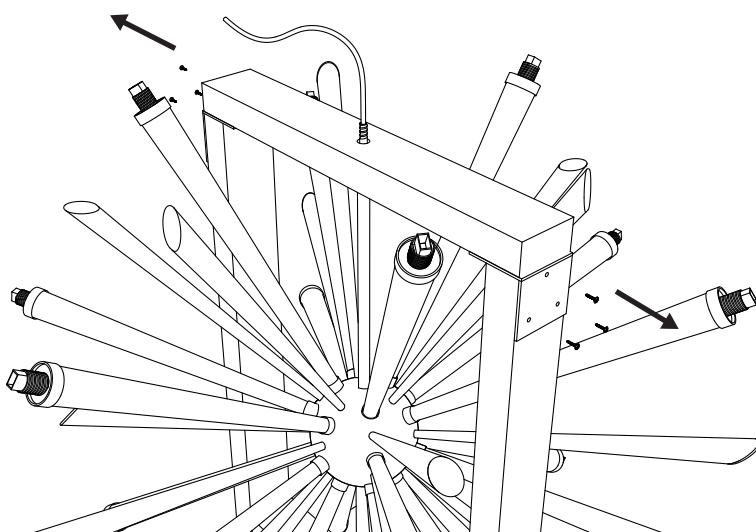


Prepare the tube that is packaged separately.

Loosen the screw on the ring slightly to lower the canopy. Place a piece of tape (such as painter's tape) under the ring to prevent the canopy from sliding down further.

Unscrew the ring from the tube.

8

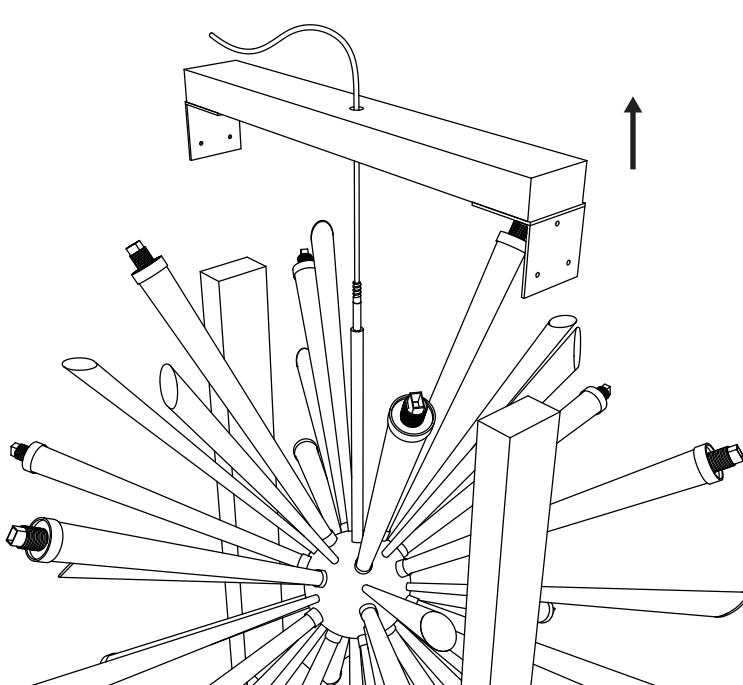


Warning : After this step, the chandelier will no longer be supported by the trestle and may tip backward or forward.

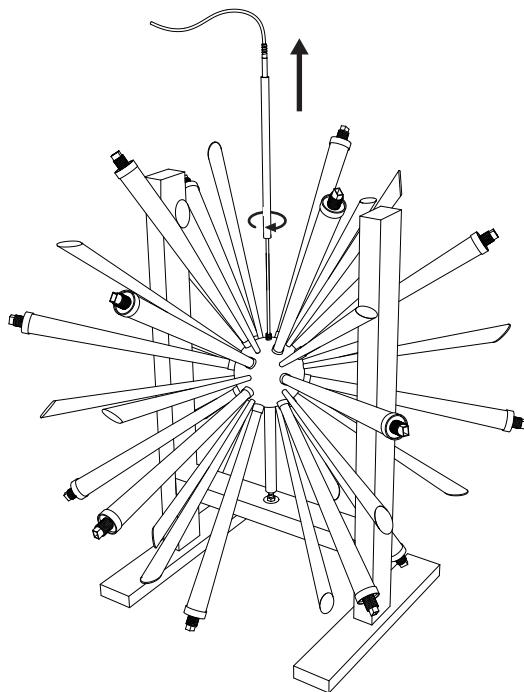
One person, wearing gloves, must hold it upright by gripping the conical brass tubes.

Once that person is in position, remove the screws securing the top cleat to the trestle.

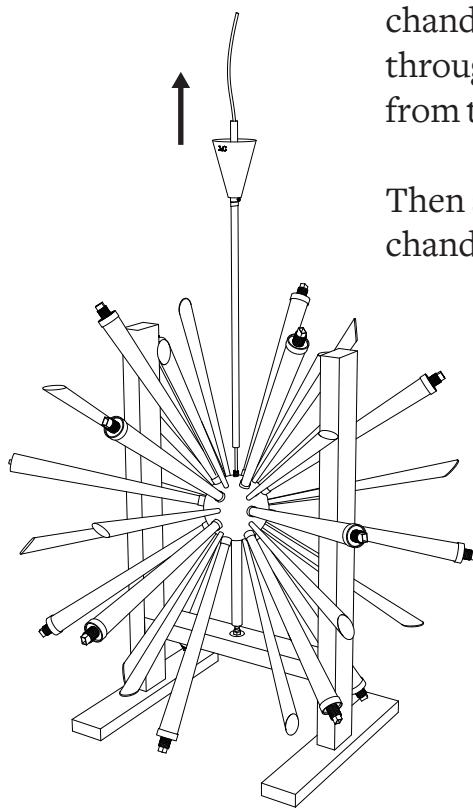
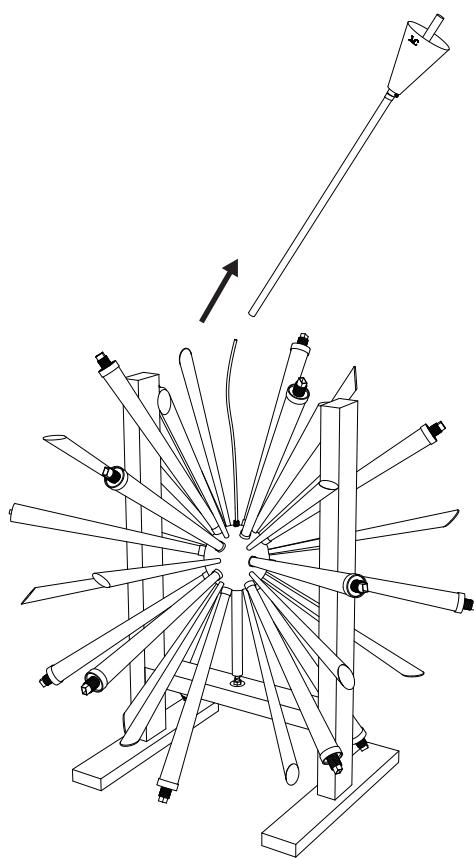
9



Carefully slide the top cleat off the trestle, guiding it along the electrical cable.

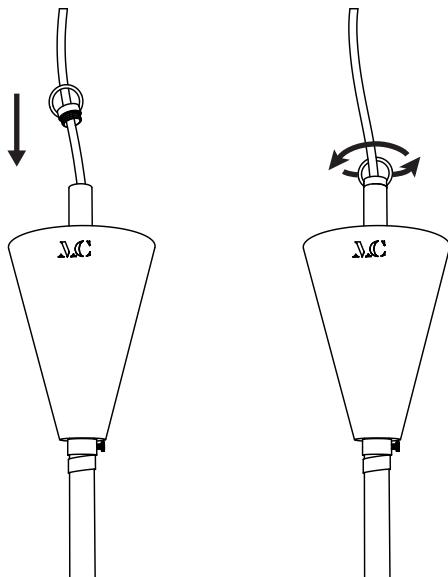
10

While the first person is still holding the chandelier, unscrew the small tube at the top of the chandelier, sliding it along the electrical cable.

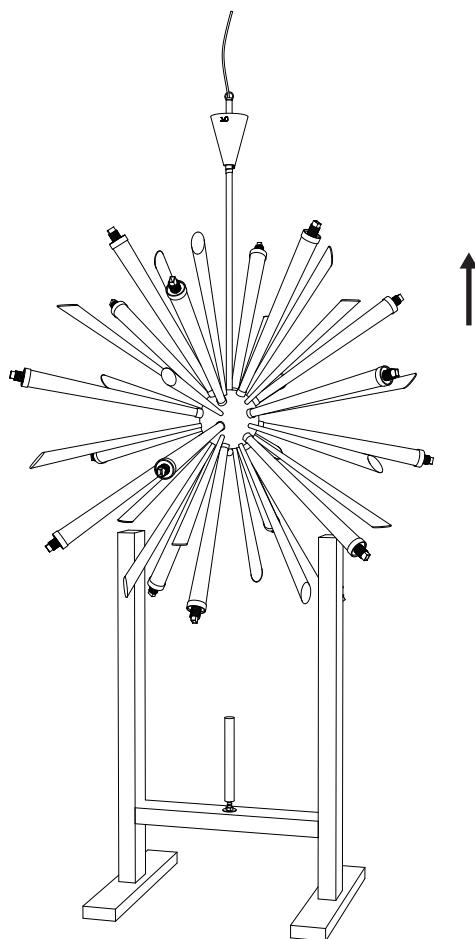
11

Take the tube and the canopy prepared earlier. Pass the chandelier's electrical cable through the tube and pull it out from the other side.

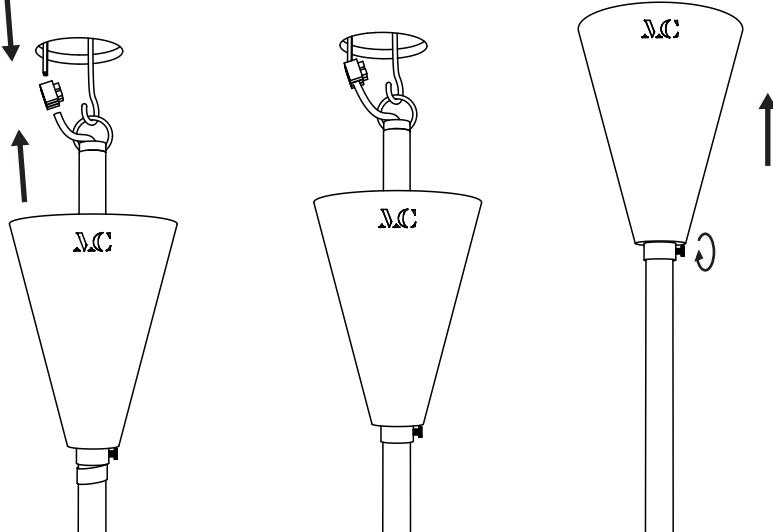
Then screw the tube onto the chandelier's central ball.

12

Take the ring previously unscrewed from the tube and pass the electrical cable through it, then screw the ring back onto the tube.

13

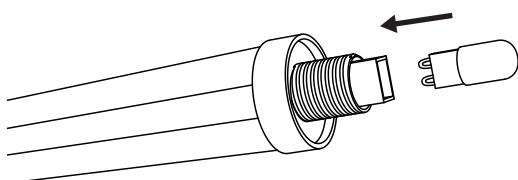
Two people will then hold the chandelier on either side of the trestle, by the conical brass tubes, still wearing gloves, and carefully lift it off the trestle.

14

Keep holding the chandelier in the air while a third person installs the ring onto the hook in the ceiling.
Connect the wires to the electrical network.
Remove the tape holding the canopy and slide it back up.
Tighten the screw on the ring.

15

Insert the bulbs into the sockets.

**16**

Screw the glass globes until resistance.
Warning ! Do not tighten more than natural resistance.

