


Glass tube  
replacement



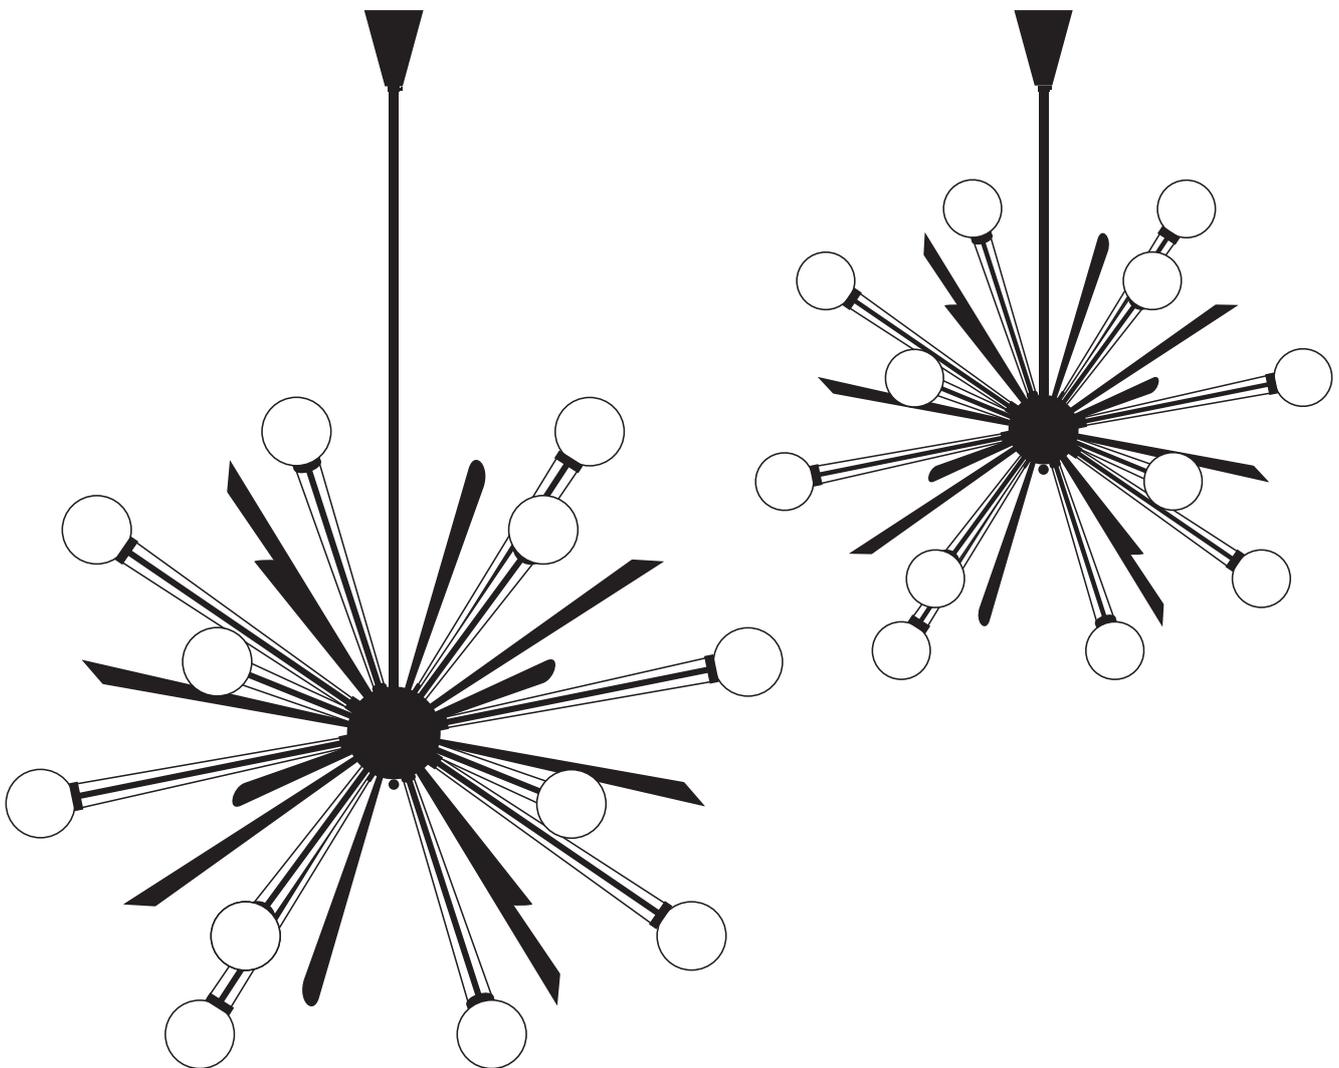

# Glass tube replacement

# Lustre Celebration V1 & V2

## The Grand Show

### Instructions

- Must be disassembled by a professional
- Handle items carefully
- Use appropriate screws and equipment
- Wear gloves during disassembly


Assembly time

1h

Number of people required

3


**1**

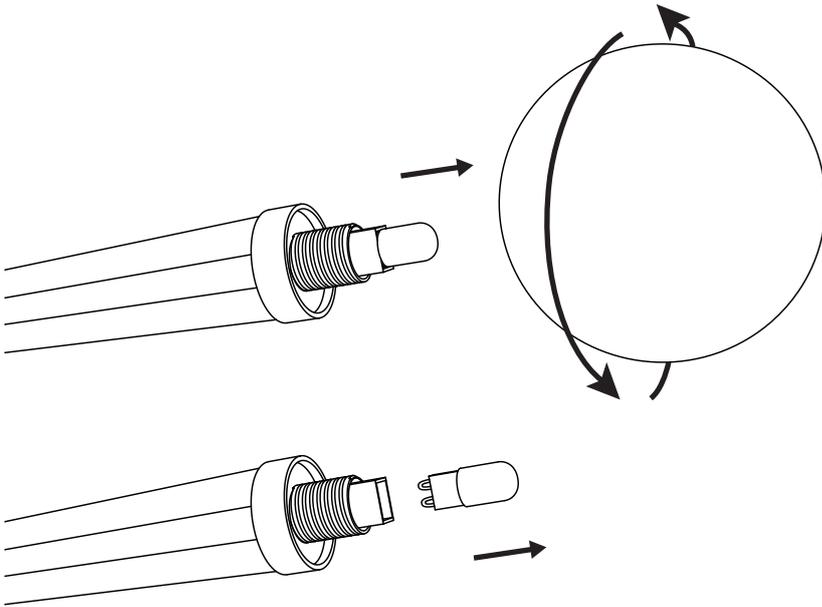

Remove all the glass globes from the chandelier.


Then take out the bulbs.

**2**

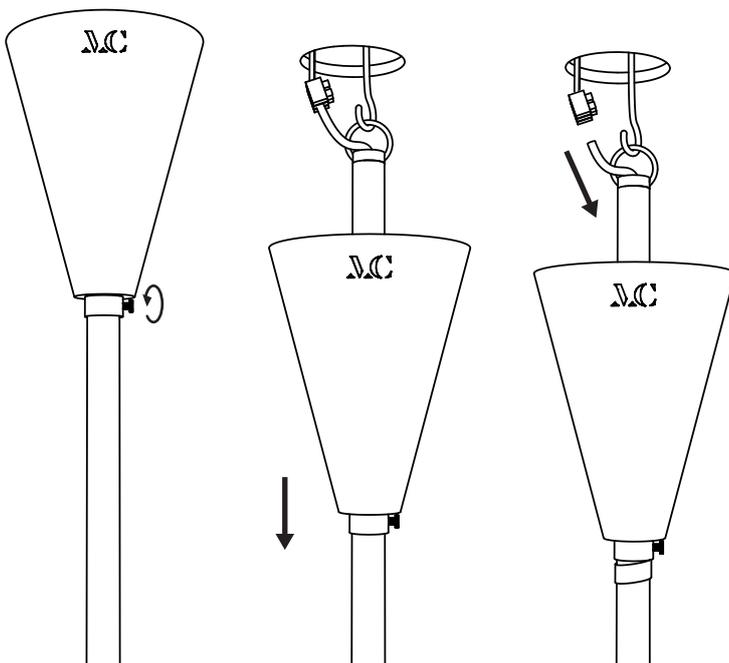


Loosen the screw on the ring slightly to lower the wire cover. Disconnect the chandelier from the power supply.

3

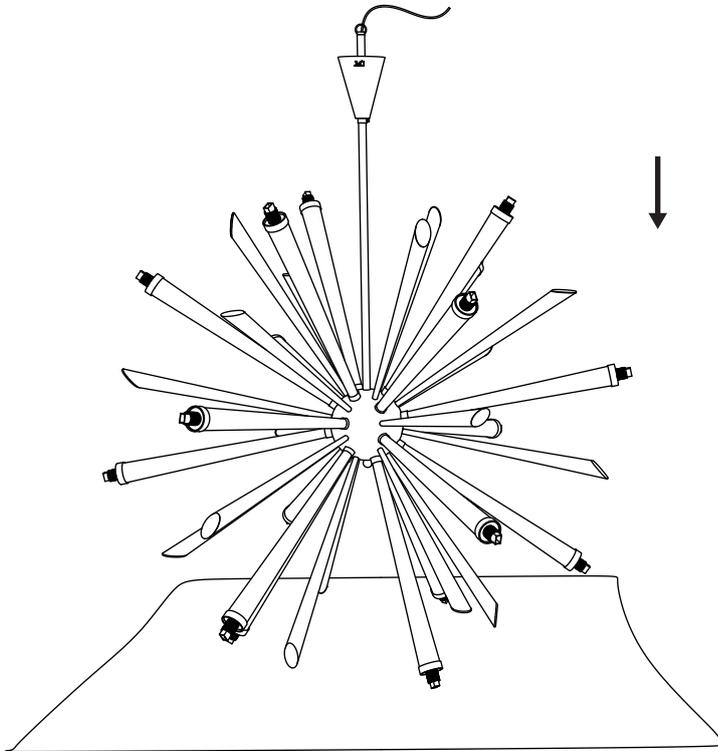


Prepare a thick blanket on the floor under the chandelier. With a partner, unhook the chandelier from the ceiling hook and carefully place it on the blanket.

4

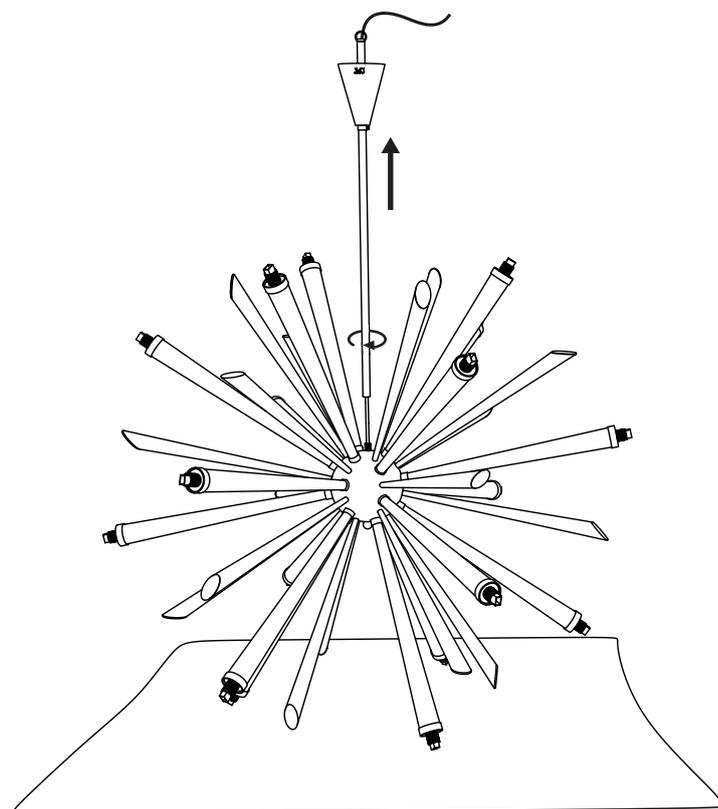


Unscrew the central tube of the chandelier and gently slide it along the cable to remove it.

5

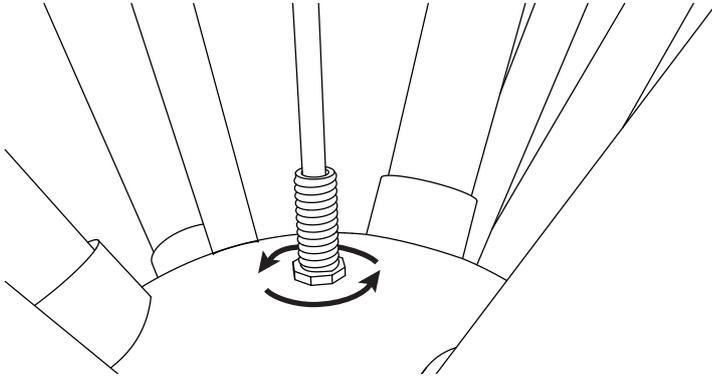


Unscrew the small nut from the threaded rod, sliding it along the cable.

Prepare a second thick blanket next to the chandelier.

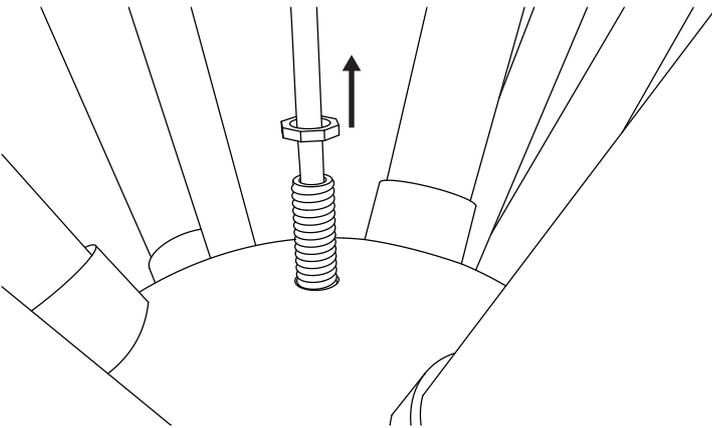


6

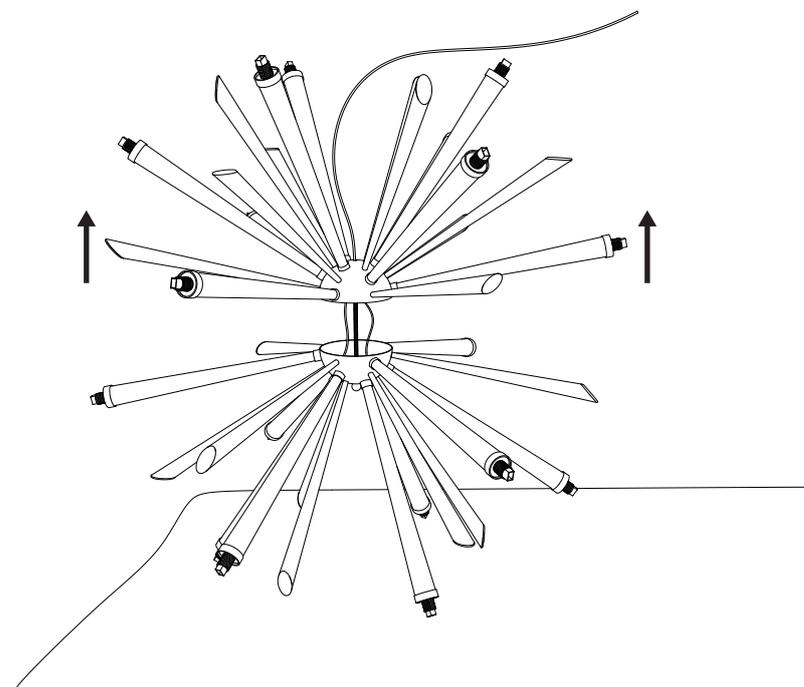


We can now open the chandelier, which is made of two parts. One person holds the lower half on the floor (holding only the brass arms), while two others gently lift the upper half, sliding it along the cable without any jerks.

7

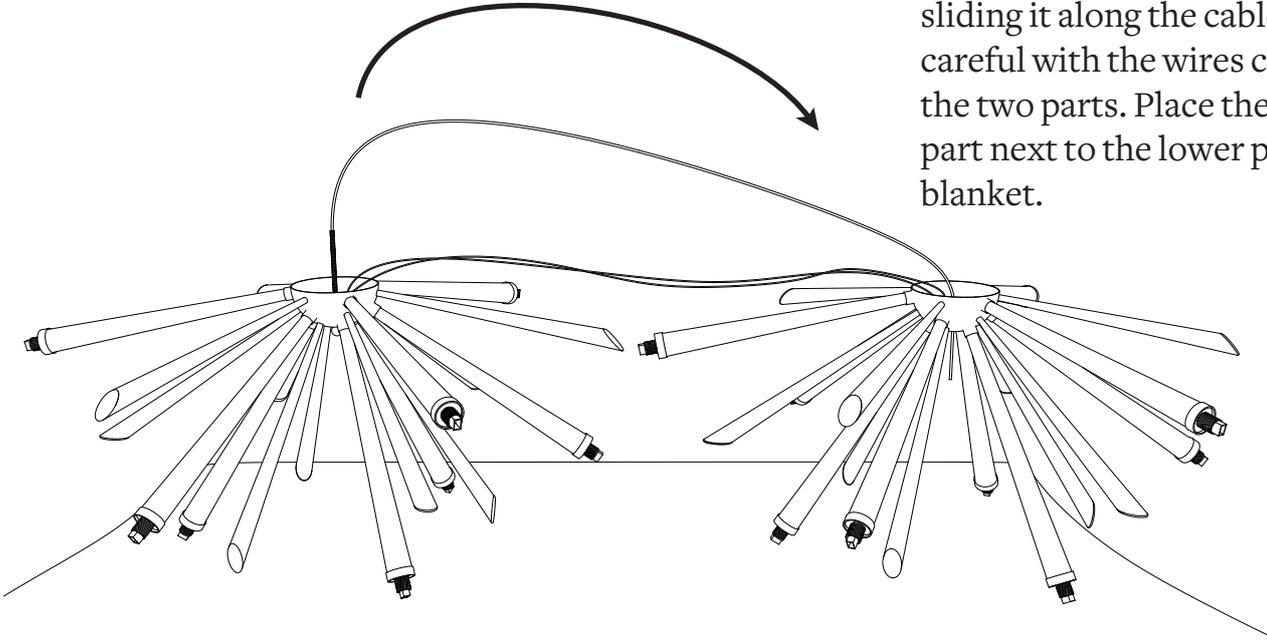


Turn over the upper part, still sliding it along the cable. Be careful with the wires connecting the two parts. Place the upper part next to the lower part on the blanket.

8

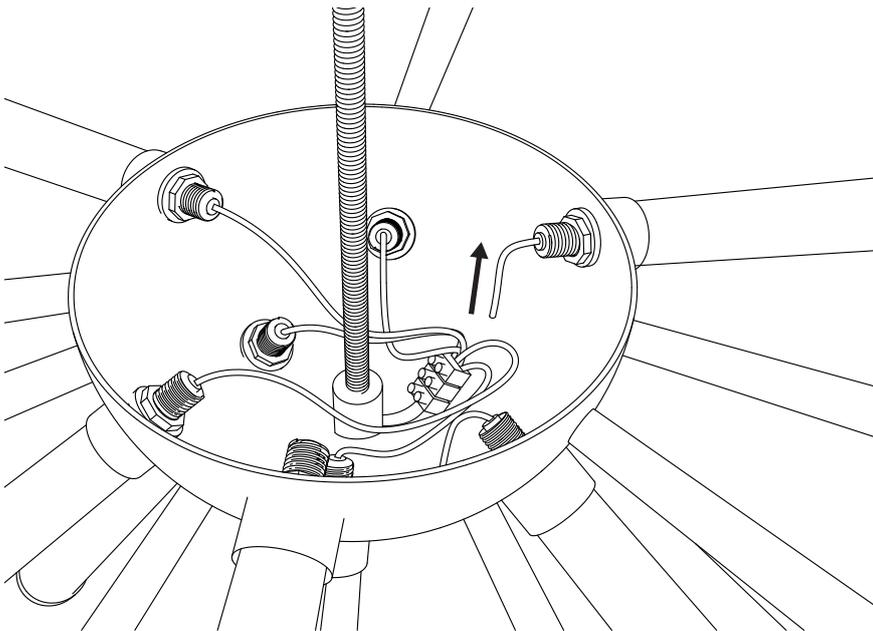


Identify the broken tube, and inside the hemisphere, disconnect it from the chandelier's wiring.

9

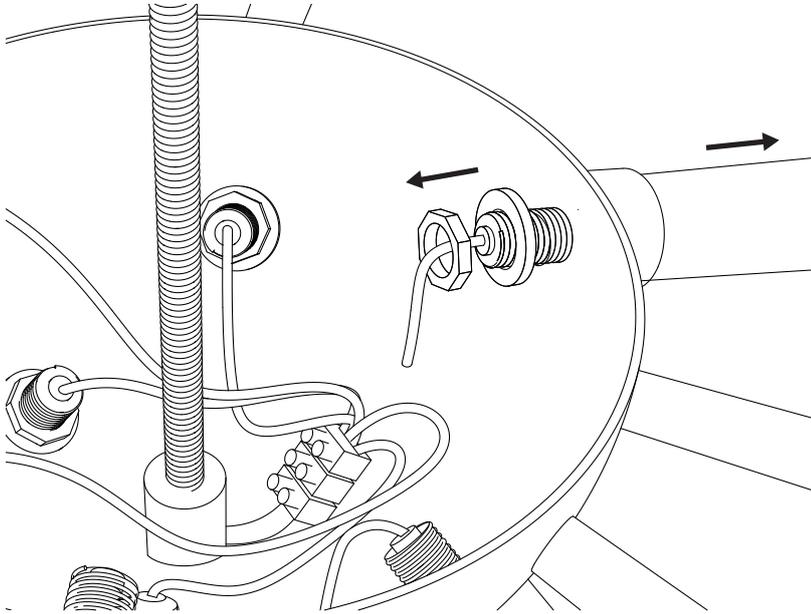


Once disconnected from the chandelier, unscrew the nut and collar of the broken glass tube, and remove the broken glass from the hemisphere.

10

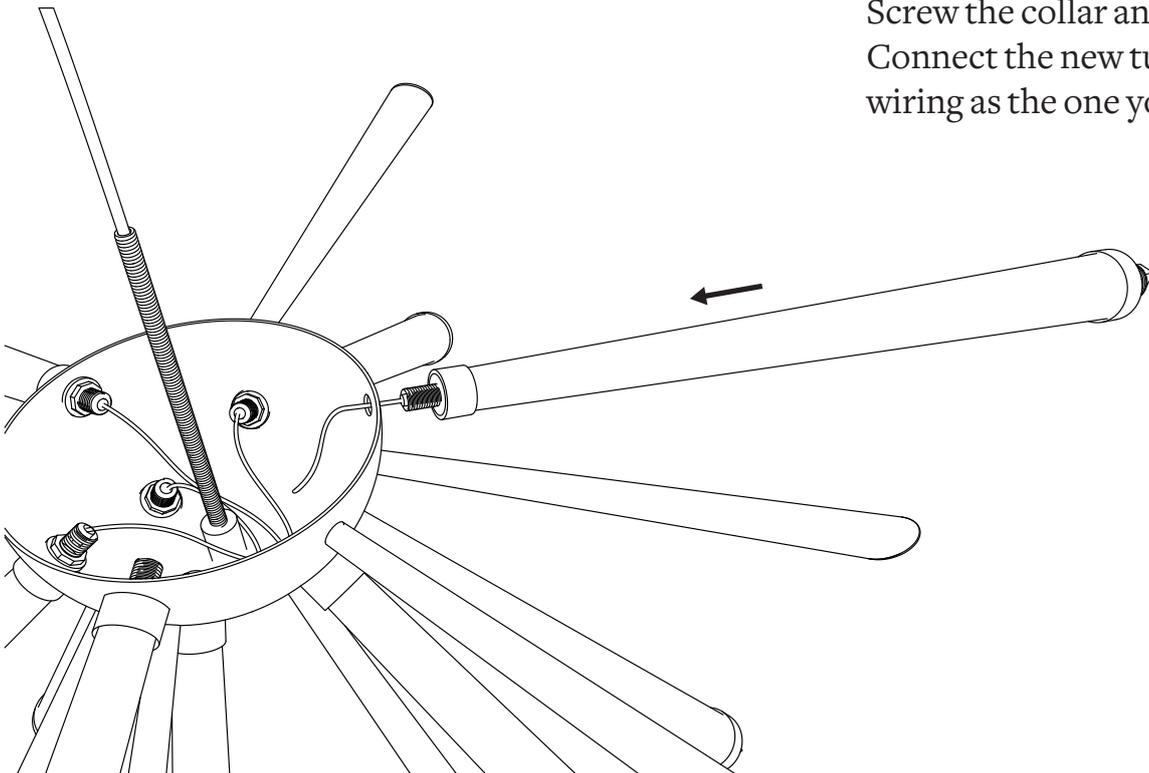


Take the replacement glass tube and insert it in place of the one you just removed. Screw the collar and nut back on. Connect the new tube to the same wiring as the one you removed.

11

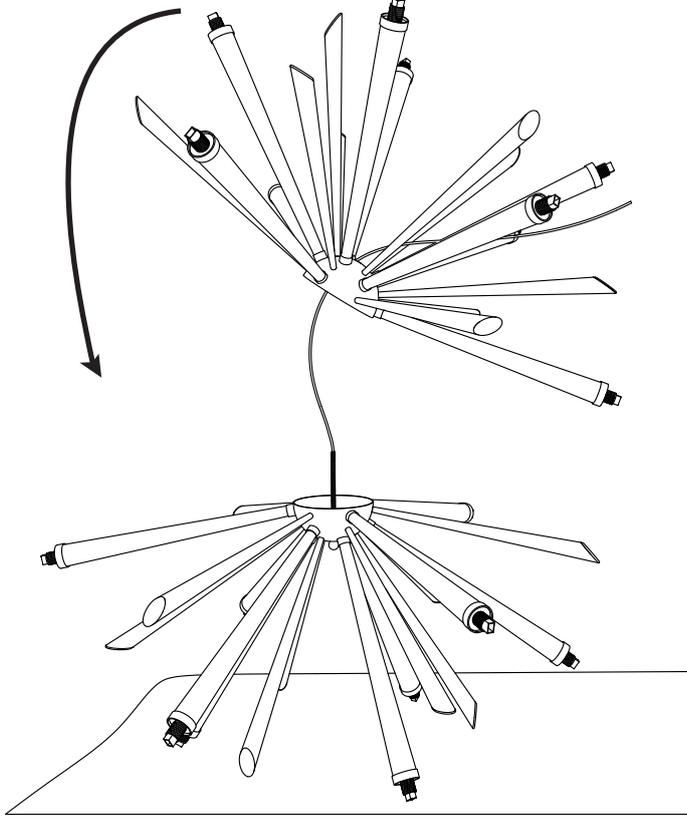


One person holds the lower part on the floor while two others lift the upper part, turn it over, and slide it along the cable. Then insert the upper part into the threaded rod of the lower part, making sure all the electrical wires are tucked inside the sphere. Three guides on the hemispheres ensure proper alignment.

12

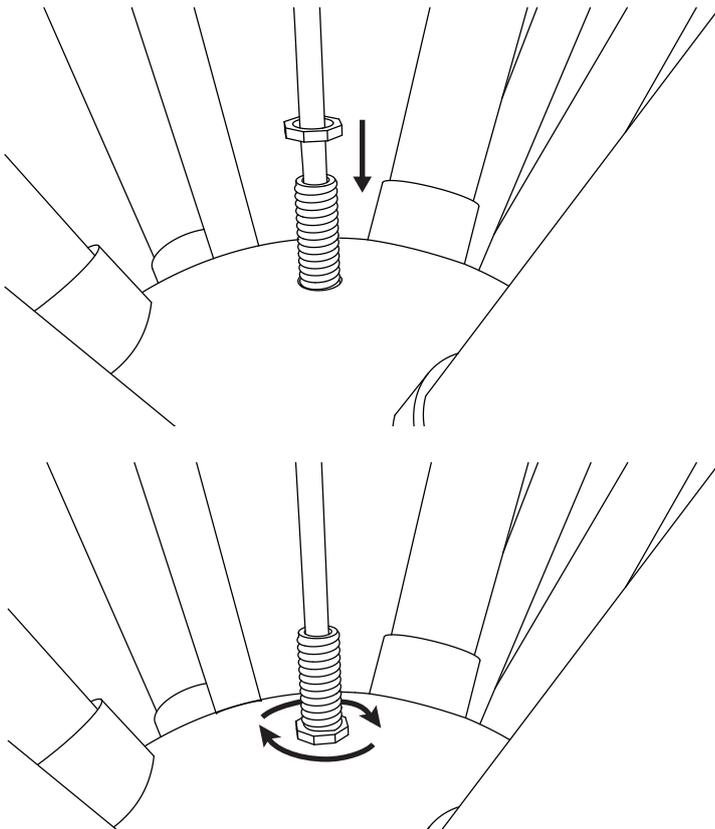


Screw the small nut onto the threaded rod to secure the central sphere.

13

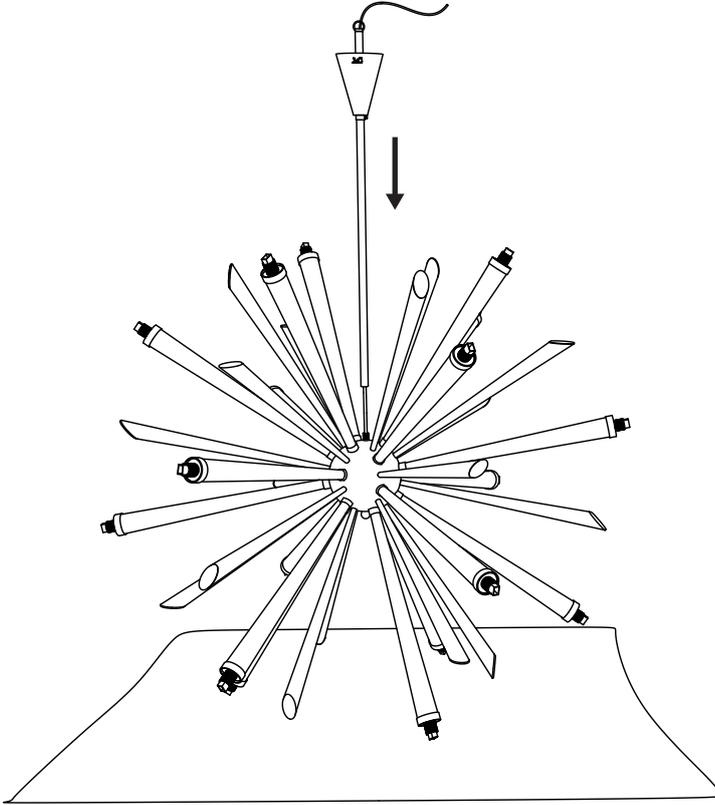


Pick up the tube with the wire cover and slide it along the cable. Screw it back onto the threaded rod.

14

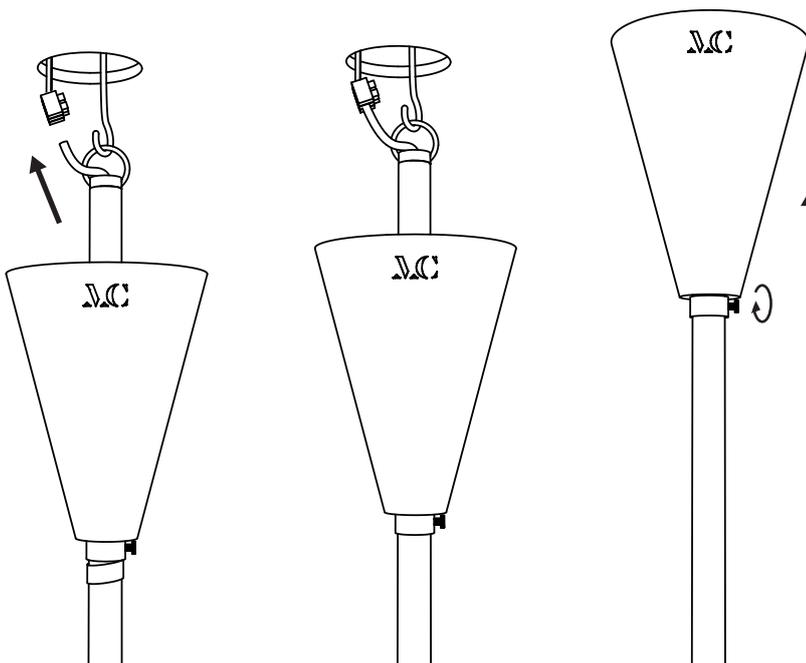


While one person stands above near the power source, the other two should lift the chandelier by the brass arms. Place the ring onto the ceiling hook. Reconnect the chandelier to the electrical system, then put the wire cover back in place. Screw the screw back onto the ring.

---

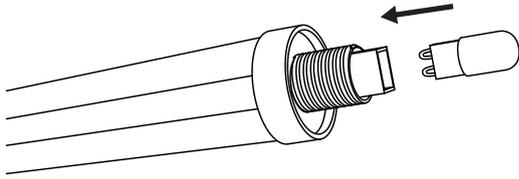**15**

Insert all the bulbs into their sockets.

---

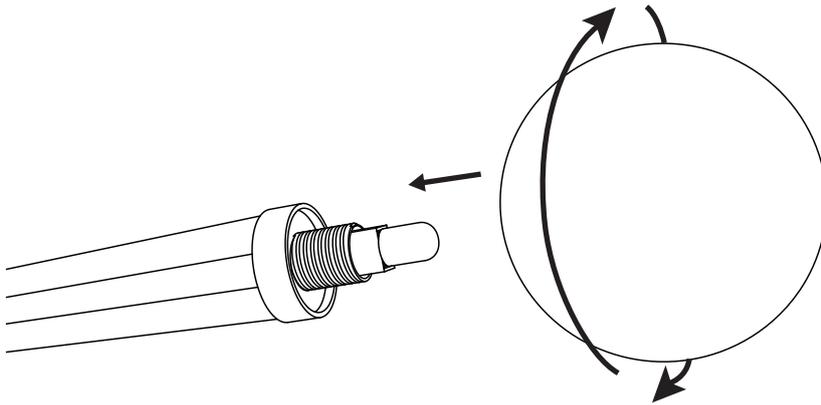**16**

Screw all the glass globes in until you feel resistance.  
Caution! Do not tighten beyond the natural resistance.